

PORTER

H-100



SPECIFICATIONS

| | |
|--|--|
| Engine | |
| Type | 2.6L Euro II diesel natural aspirated |
| Bore x Stroke (mm) | 91.1 x 100 |
| Compression Ratio | 22 : 1 |
| Max. Power (ps/rpm) | 79 @ 4,000 |
| Max. Torque (nm/rpm) | 167 @ 2,200 |
| Valve System | Single overhead camshaft, 2 valves / cylinder |
| Fuel System | Min-Max type governor, bosch type injection pump |
| Fuel type | Diesel |
| Fuel Tank (l) | 65 |
| Suspension | |
| Front | Double Wishbone & Torsion Bar with ø 25mm Stabilizer Bar |
| Rear | Semi-elliptic Laminated Leaf Springs |
| Load capacity | |
| Load Area | 4539 mm ² |
| Maximum Towing Weight (Braked Trailer) | 1 Ton |
| Steering | |
| Type | Hydraulic Power Assisted (Rack and Pinion with Collapsible Universal Joint and Column) |
| Minimum Turning Radius (m) | 5.3 |
| Wheels and Tyres | |
| Wheel | Steel Rim 6.0J x 15" |
| Tyre (mm) | 195 / 70 R15 C |
| Spare Tyre | Full Size Steel Rim |
| Brakes | |
| Front (mm) | ø 274 mm Ventilated disc |
| Rear (mm) | ø 260 mm Solid Drum |
| Load Sensing Proportioning Valve | Standard |
| Brake Booster | 8 + 9" Tandem |
| Drivetrain | |
| Transmission | 5 speed Manual |

APPLICATIONS



DIMENSIONS



* Above dimensions are based on standard cab extra-long wheel base pictured here

Hyundai Nishat Motor (Pvt.) Ltd.
 1-B, Aziz Avenue, Canal Bank Road, Gulberg V, Lahore
 Phone +92-42-111 111 466, www.hyundai-nishat.com
 hyundaipakistan

FEATURES



Head



Efficient gauge cluster design



AM/FM/BT/AUX/USB Audio System



Rear Flat High Deck




Roomy Interior



Naturally Aspirated 2.6L diesel engine

Disclaimer: For exact models, specifications and colors – please consult your Hyundai dealer. Some of the equipment illustrated or described in this leaflet may not be supplied as standard equipment and may be available at extra cost. Hyundai Nishat Motor (Private) Limited reserves the right to change specifications and equipment without prior notice.

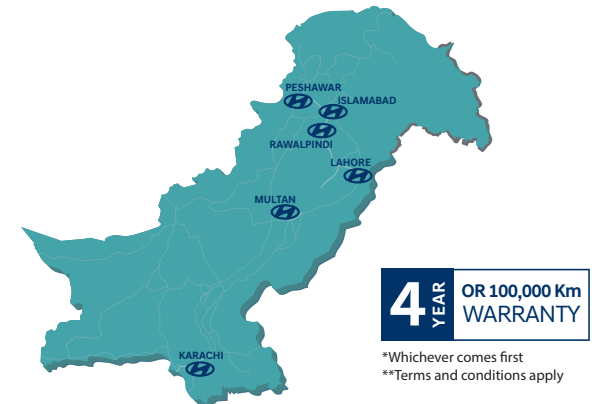

4 YEAR OR 100,000 Km **WARRANTY**

*Whichever comes first
 **Terms and conditions apply